Racks



Bicycle racks are the most popular method of parking or securing bicycles. They are normally the most economical option and the preferred choice by cyclists.

Securabike's extensive range of racks is designed to cater for virtually every type of application likely to be encountered. Whether for use in above or below ground parking, for 4 or 400 bicycles, Securabike has a bicycle rack suitable.

Securabike offers economical do-it-yourself flat packed units or fully welded units for use in locations where vandal resistance or high security is required.

As one of the largest manufacturer of bicycle parking products for over 20 years, Securabike provides you with the knowledge that when you specify or purchase a Securabike bicycle rack, you can be confident in selecting the best product available.

Bicycle Racks Advantages

- Allow the maximum number of bicycles and the best utilisation of available space
- · Best suited for medium to long term parking
- Efficient bicycle storage

M Secura Bike

- Long lasting and durable
- Easily installed
- Economical

Applications

- Residential apartments
- Recreation centres
- Workplaces
- Schools, colleges and universities
- Retail shopping centres
- Train and bus interchanges

Materials

Securabike bicycle racks are manufactured from high strength mild steel or aesthetically attractive stainless steel. While most models are available in both materials, please check the specification details on the product you are considering.

- Mild steel units are available in hot dipped galvanised or electrostatically powder coated
- Stainless steel units are available in a linished finish or electropolished.

Finish

Steel racks are normally supplied in either galvanised or our standard range of powder coated colours (see page 128). Special colours are available at extra cost.





securabike.com.au 🎎

Product Range

1

4

Introduction

Bicycle Facts

Design Guide	6
Installation	12
Consulting	13
Security Classes	14
Product Selection	15
PRODUCT RANGE	
Rails	17
Racks	29
Repair Stations	53
End-of-Journey	56
Cages	72
Lockers	76
Shelters	84
Scooters Racks	91
Other Products	94
Standards	99
Packaging	100
Index	101

Bicycle Racks

1300 780 450

Product

Range

OUR MOST POPULAR RACK









The Compact

Popular with cyclists as the leaning rail provides full support of the bicycle minimising the possibility of accidental damage.


It also allows cyclists to securely locate the front or back wheel while allowing them to use a 'U' lock to secure the frame and the other wheel to the leaning rail.

Wheel supports have staggered heights which allows bicycles to be located with 300mm spacings rather than the normal 600mm as with other racks.

In outdoor locations where vandal resistance may be a consideration, Securabike recommends

the fully-welded model (CBR4SCTM), made from heavier steel sections to provide a more robust alternative.

The CBR4SC is the logical choice when catering for and securing large numbers of bicycles – doubling the number that can be securely parked in a given area.

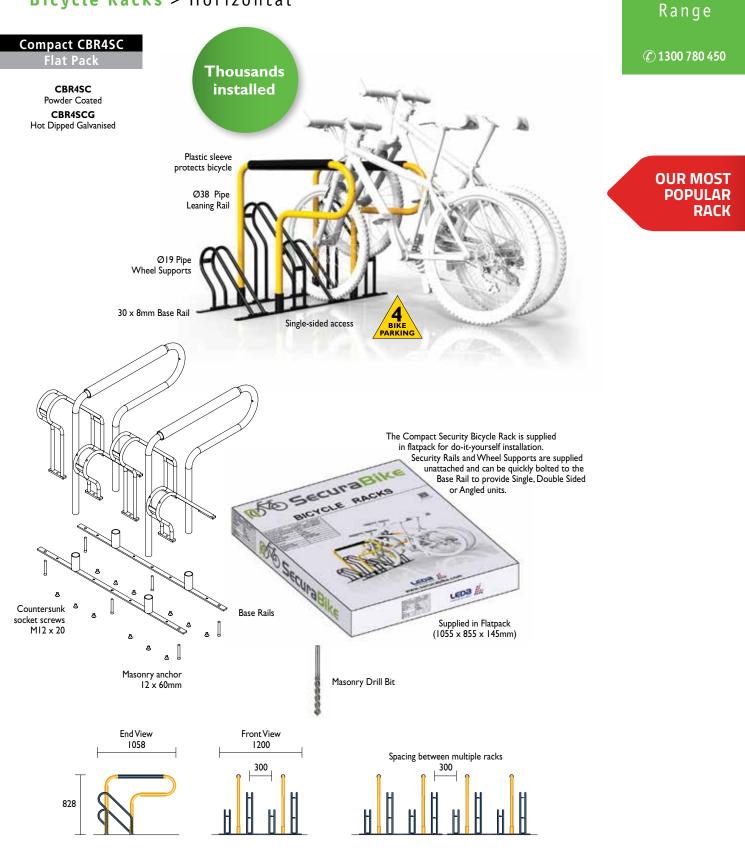


 Material Specifications (General)

 Rails
 32NB (38.0) × 1.5mm Pipe / Powder coated / Hot dipped galvanised finish

 Supports
 Ø19 × 1.2mm Pipe / Powder coated / Hot dipped galvanised finish



Product

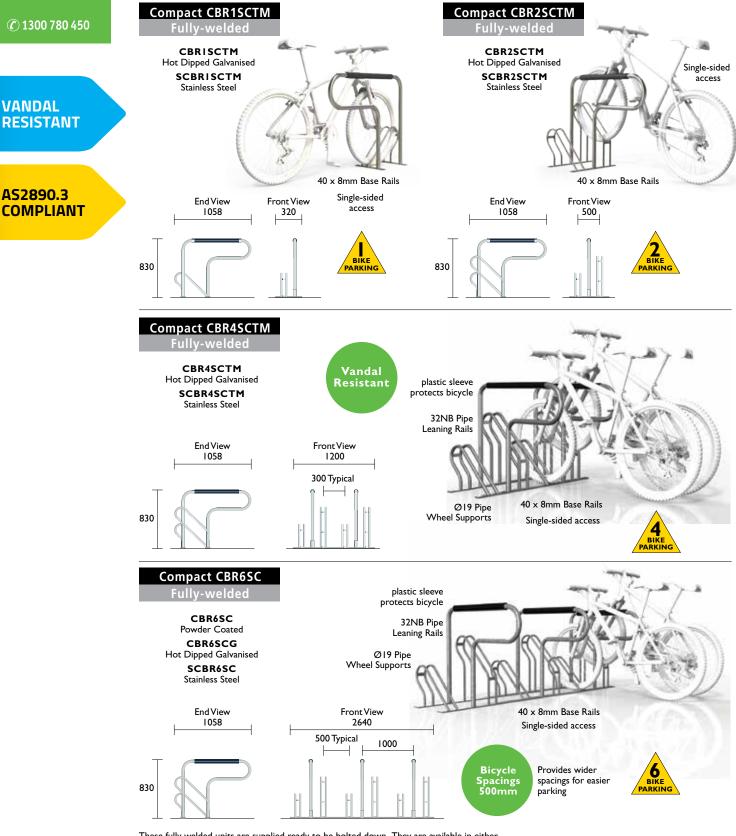

These fully welded units are supplied ready to be bolted down. They are available in either hot dipped galvanised or stainless steel. Being fully welded, they are more suitable for vandal resistant applications.

Material Specifications (General)

Mild steel 32NB (38.0) × 1.5mm / Ø19 × 1.2mm Pipe / 8mm Plate / Hot dipped galvanised / Powder coated in a range of colours Stainless steel 32NB (38.0) × 1.5mm / Ø19 × 1.2mm Stainless steel pipe / 8mm Plate / Linished




Edition 8b - Nov 2017

Product

Range


Product Range

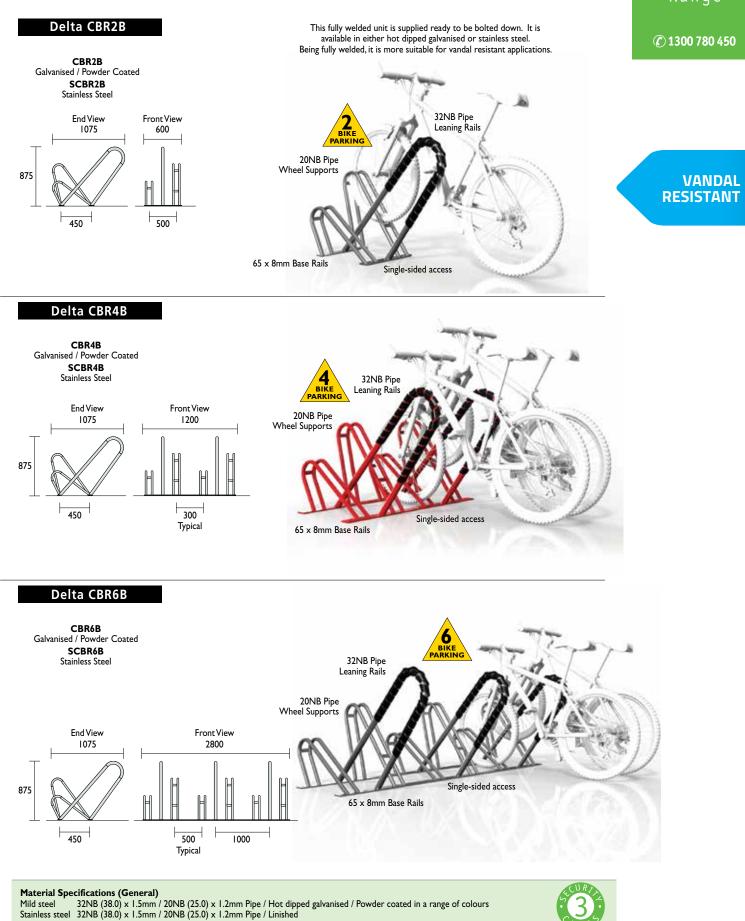

Product

Range

1300 780 450

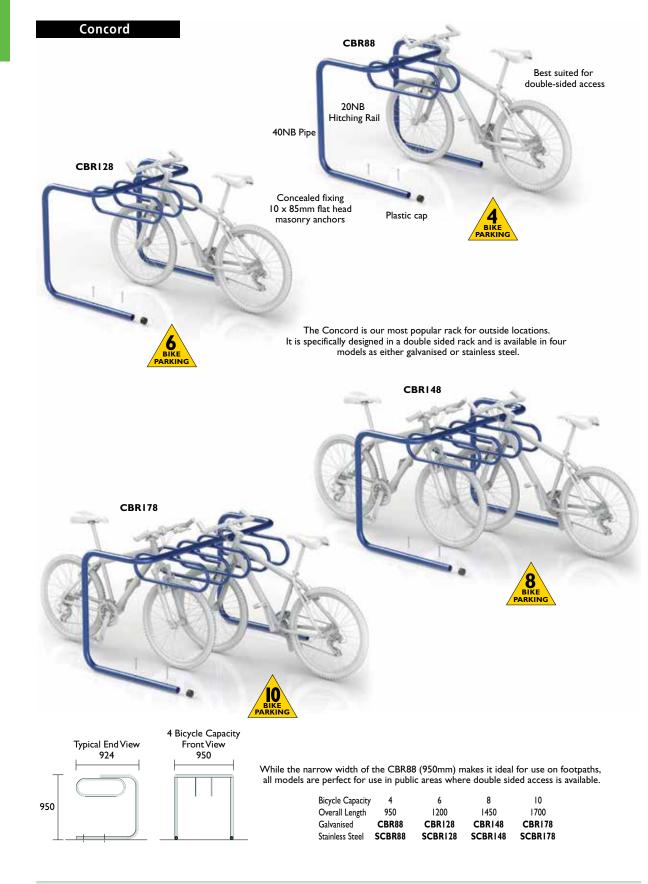

 Material Specifications (General)

 CBR88
 Galvanised
 40NB (48.3) x 3.2mm / 25NB (33.7) x 2.6mm / 20NB (26.9) x 2.6mm pipe / Powder coated in a range of colours


 Stainless steel
 40NB (48.26) x 2.77mm / 25NB (33.4) x 2.77mm / 20NB (26.7) x 2.1 Imm Stainless steel pipe / Linished




BCCR

Product Range

1300 780 450

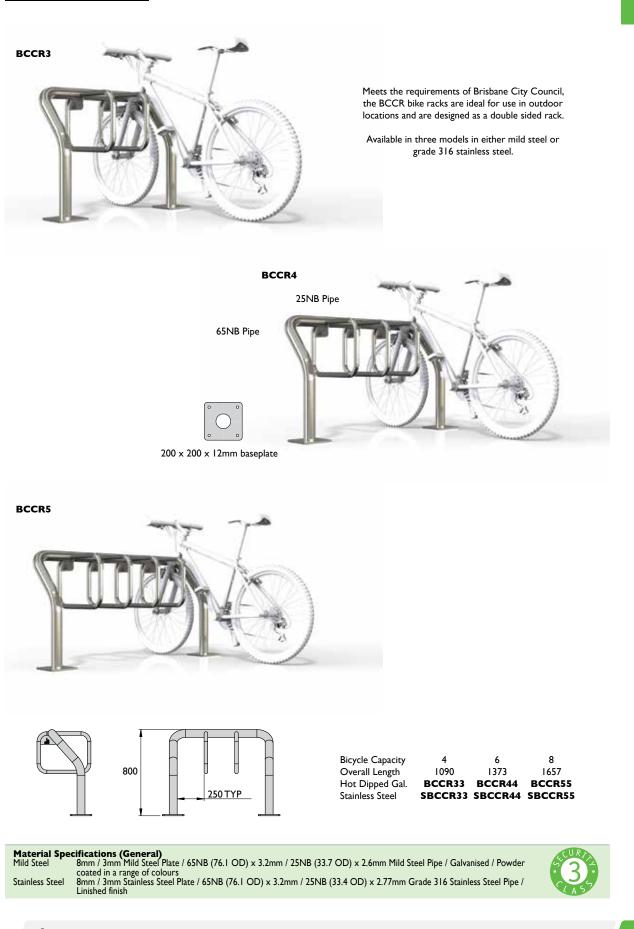

M Secura Bike

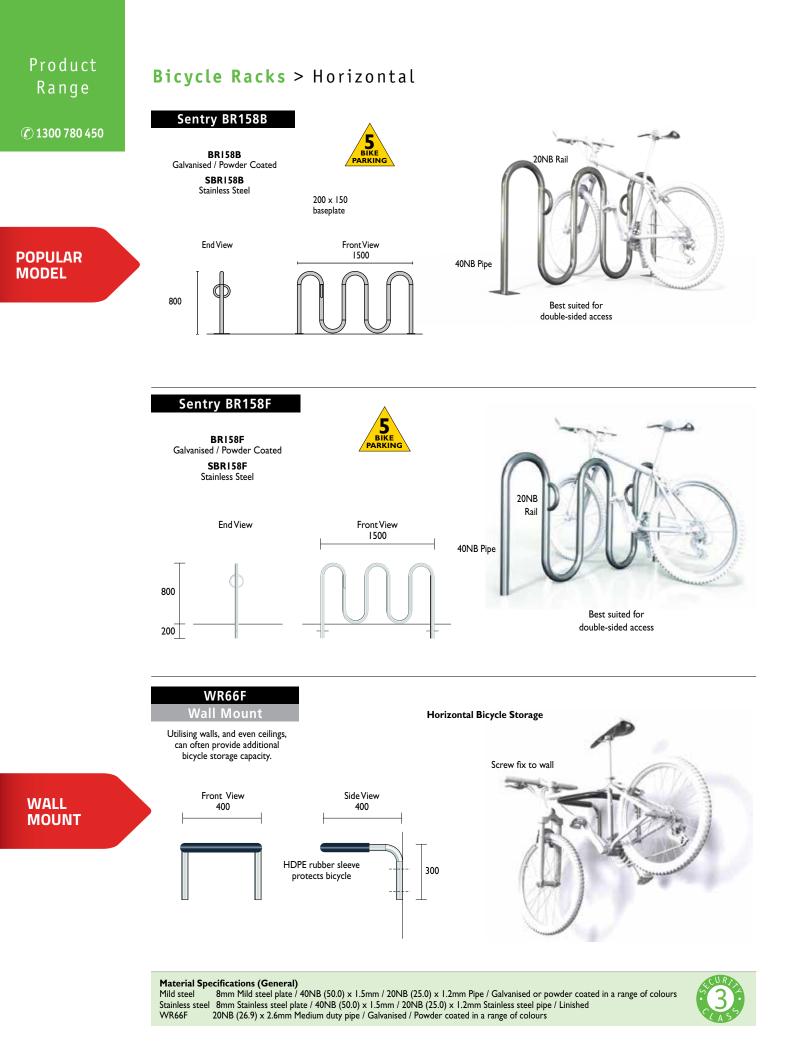

🅌 securabike.com.au


Edition 8b - Nov 2017

Product Range

1300 780 450




CBR4SC SL Hot Dipped Galvanised SCBR4SC SL Stainless Steel Space can be tight in busy bicycle parking stations so the CBR4SC SL is designed to slide bicycles apart giving cyclists better access, more room to move and allowing easier locking of bicycles.

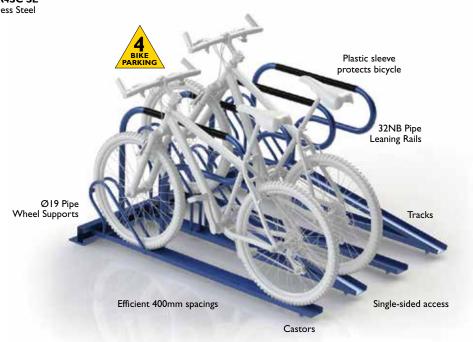

Top View Multiple rack installation

Rack slides to allow easy access to bicycles

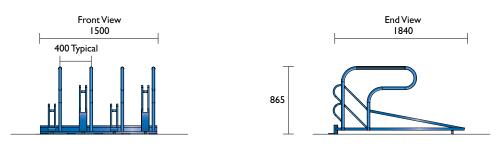

Note: CBR4SC SL needs to be on perfectly flat ground or the bikes will slide down hill on rollers.

 Material Specifications (General)

 Mild steel
 32NB (38.0) × 1.5mm / Ø19 × 1.2mm Pipe / 8mm plate / Hot dipped galvanised / Powder coated in a range of colours

 Stainless steel
 32NB (38.0) × 1.5mm / Ø19 × 1.2mm Stainless steel pipe / 8mm plate / Linished



Product Range

Bicycle Racks > Horizontal

CBR2GS

Dual Heigh


1300 780 450

CBR2GSA top tier 1287mm high CBR2GSB top tier 1529mm high So you can stagger heights, be sure to nominate the quantity of each required. Provides the maximum utilisation of allocated horizontal storage and parking, and is easy to use. Simply pull out the sliding base rail until it reaches its pivot point, and fold down to allow easy positioning of your bicycle. A leaning rail provides stability and a secure point for locking both the frame and the wheel.


for easy assembly on site.


for a total of 2 bicycles.


ASSISTED LIFT












AS2890.3 **COMPLIANT**

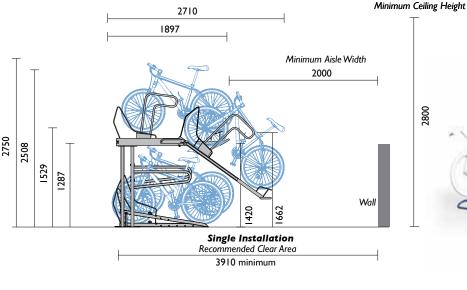

in a double storey locker.



 Material Specifications (General)

 Frame
 125 x 75 x 3mm RHS / Hot dipped galvanised / Powder coated in a range of colours

 Extensions
 65 x 65 x 3mm Track / 75 x 40 x 4mm Channel / 20NB (25.0) x 1.2mm Pipe / Hot dipped galvanised




CBR2GS

Dual Heigh

Installation layouts

Securabike offers a free design and layout service to assist architects and builders. Alternativly you can also use the information below to plan the best use of the space available for bicycle parking. The CBR2GS system is designed to maximise the number of bicycles that can be accommodated.

Racks can be angled for smaller width rooms

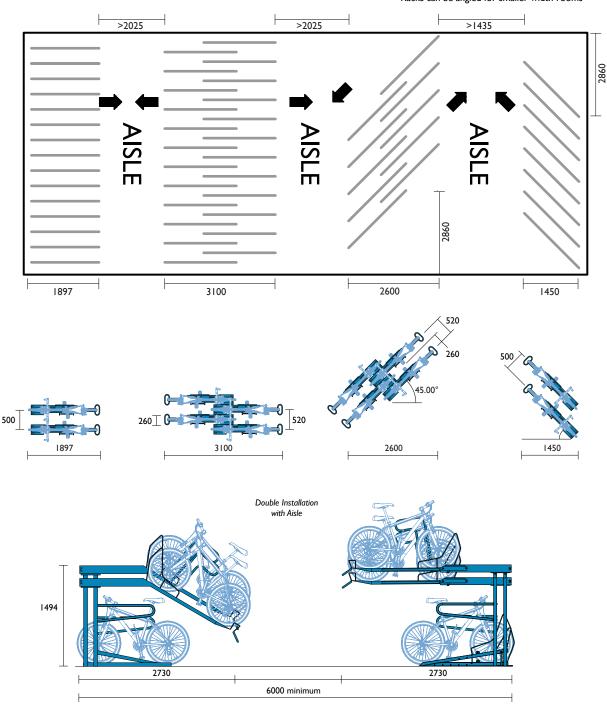

Product Range

1300 780 450

 Material Specifications (General)

 Frame
 125 x 75 x 3mm RHS / Hot dipped galvanised / Powder coated in a range of colours

 Extensions
 65 x 65 x 3mm Track / 75 x 40 x 4mm channel / 20NB (25.0) x 1.2mm pipe / Hot dipped galvanised



Product Range

Bicycle Racks > Horizontal







Double Height Storage

450

The CBR10GS is a cost effective dual height bike rack that accommodates parking for 10 bicycles. Staggered heights allow bicycles to be packed closer together without clashing of handlebars.

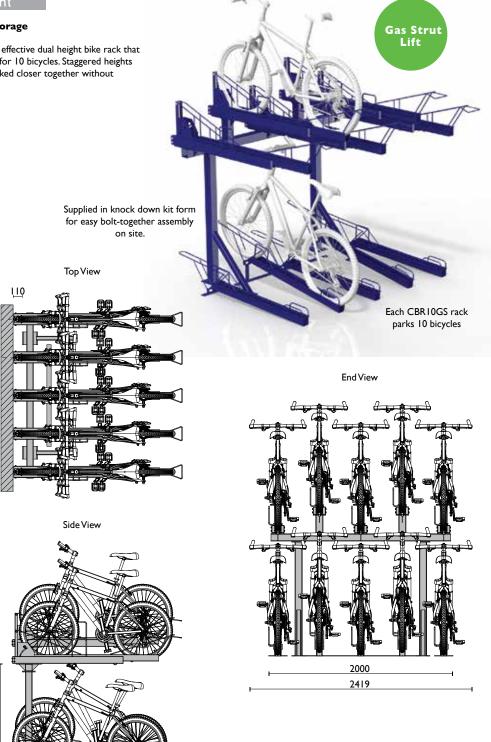

10 BIKE PARKING

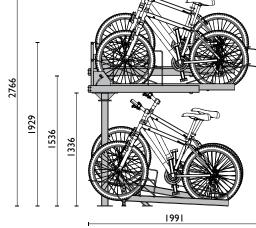


Material Specifications (General)Frame80 x 80 x 3mm SHS 2mm / 3mm mild steel plate / 8mm mild steel bar Hot dipped galvanised Extensions Finish

CBR10GS

Installation layouts

Securabike offers a free design and layout service to assist architects and builders. You can also use the information below to make the best use of the space available.

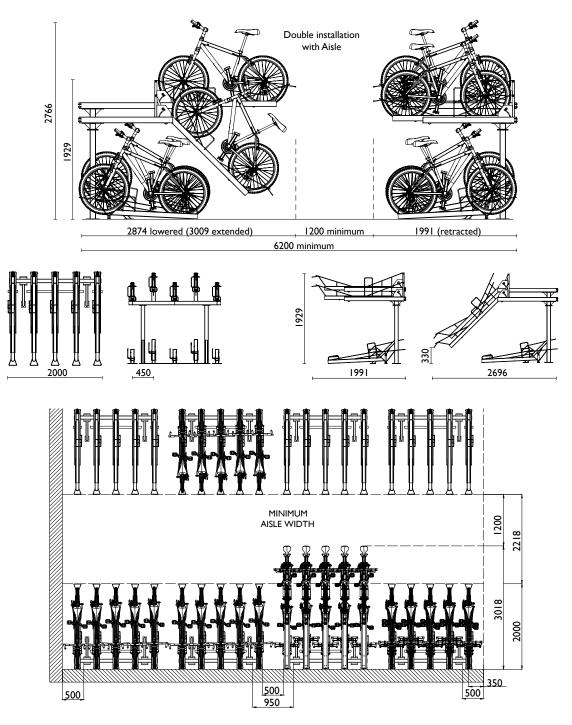

 Material Specifications (General)

 Frame
 80 x 80 x 3mm SHS

 Extensions
 2mm / 3mm mild steel plate / 8mm mild steel bar

 Finish
 Hot dipped galvanised

Product Range


1300 780 450

1 Secura Bike

Product Range


Bicycle Racks > Horizontal

1300 780 450



BRP01

Planter Box





BRP02 Planter Box Top View 2140 32NB Pipe 917 1800 250 25NB leaning rails with protective sleeve End View Drainage holes in planter base 306 223 200 Planter box depth 350mm 800 1000

 Material Specifications (General)

 Planter
 0.8mm Galvanised sheet / Powder coated in a range of colours

 Rack
 25NB (32.0) x 1.5mm pipe Galvanised / Powder coated in a range of colours



Range BRP03 / 04 / 05 1300 780 450 **Planter Boxes** Green your suburb BRP03 Top View 1800 350 deep planter box, drainage holes in base 250 Typical GREEN YOUR SUBURB BIKE PARKING 306 Typical End View 32NB leaning rails with protective sleeve 1000 BRP03 planter box Illustrated 800 BRP05 Top View BRP04 6024 Top View 1800 250 Typical 250 Typical 4600 1000 4212 20 BIKE End View End View Planter box depth 350mm 1000 800

 Material Specifications (General)

 Planter
 I.5mm Galvanised sheet / Powder coated in a range of colours

 Rack
 32NB (38.1) x 1.6mm pipe Galvanised / Powder coated in a range of colours



Product




Bicycle Racks > Horizontal > Corrall


1300 780 450


CSBR01F / B Cadil

An easy way of converting street-located car spaces to a parking facility of up to 12 bicycles. Ideal for local governments to provide temporary or permanent secure bicycle parking.




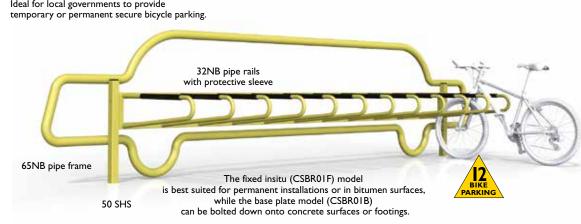

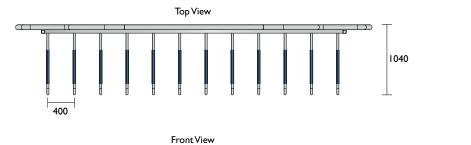

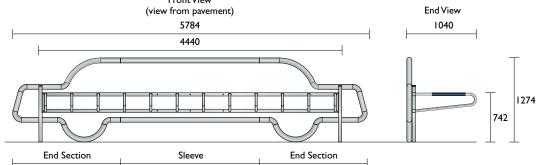

Manufactured in 2 mirror-reversed sections with sleeve straight section

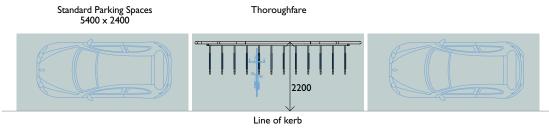



 Material Specifications (General)

 Rack
 50 x 50 SHS Mild Steel / 32NB (38.0) x 1.5mm Pipe / Galvanised / Powder coated in a range of colours

 Profile
 65NB (76.1) x 3.6mm pipe / Galvanised / Powder coated in a range of colours



Edition 8b - Nov 2017

Bicycle Racks > Horizontal > Corrall

Product Range


1300 780 450

CSBR02F / B

Lincoln


An easy way of converting street-located car spaces to a parking facility of up to 8 bicycles. Ideal for local governments to provide temporary or permanent secure bicycle parking.



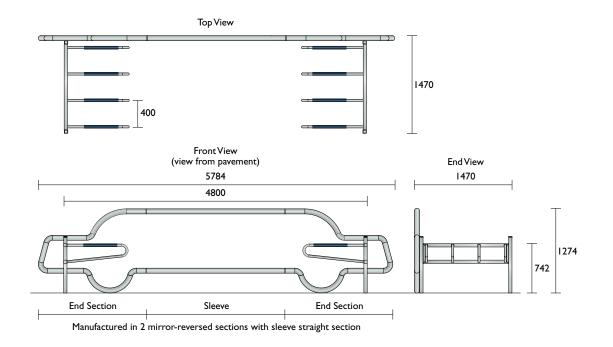


Standard Parking Spaces 5400 x 2400

Thoroughfare

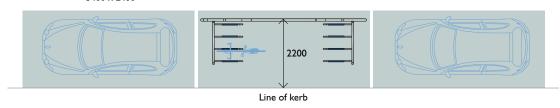

Footpath









1300 780 450

Bicycle Racks > Horizontal > Corrall

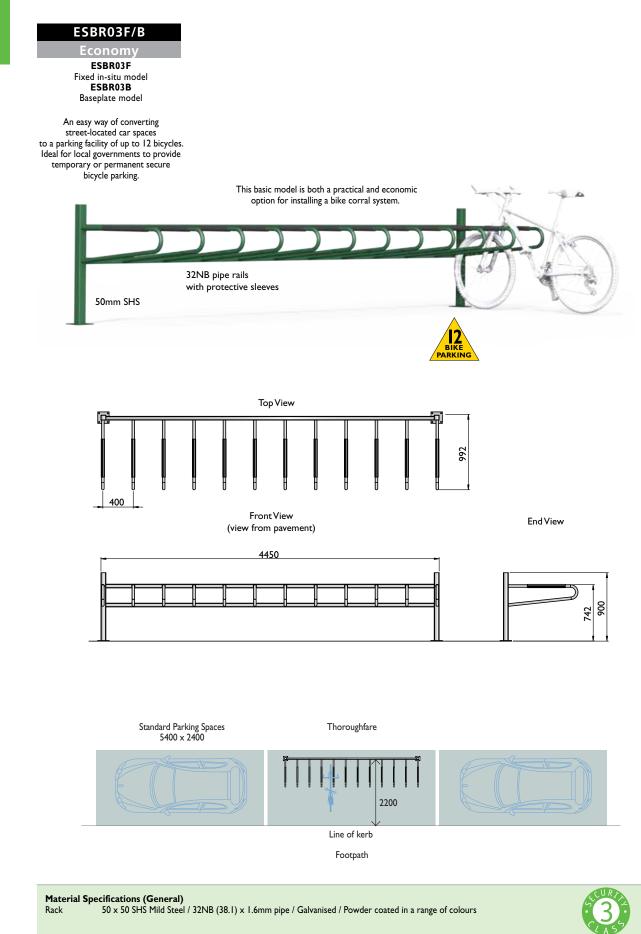

Edition 8b - Nov 2017

1300 780 450

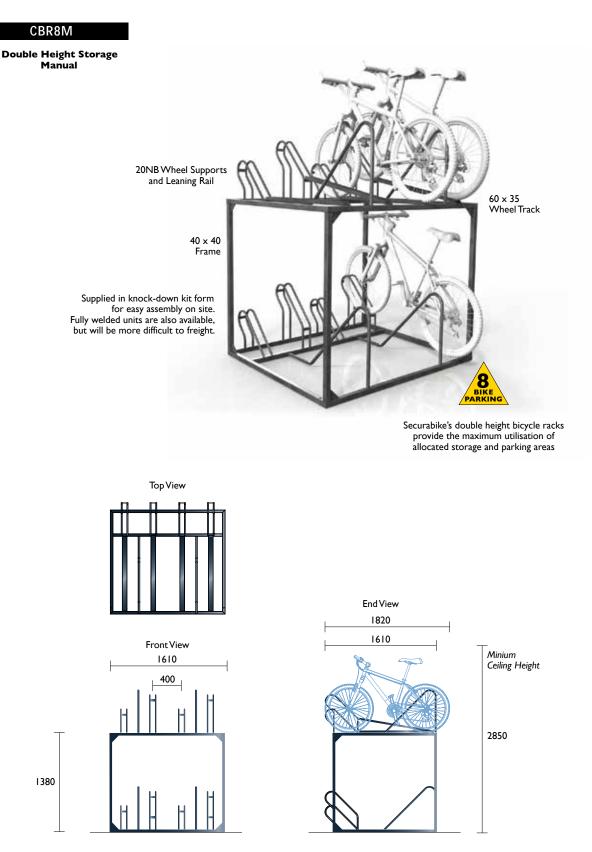


 Material Specifications (General)

 Frame
 40 x 40 SHS / Hot dipped galvanised / Powder coated in a range of colours

 Supports
 20NB (25.0) x 1.2mm Pipe / 60 x 35 x 2mm Track / Powder Coated / Hot Dipped Galvanised Finish




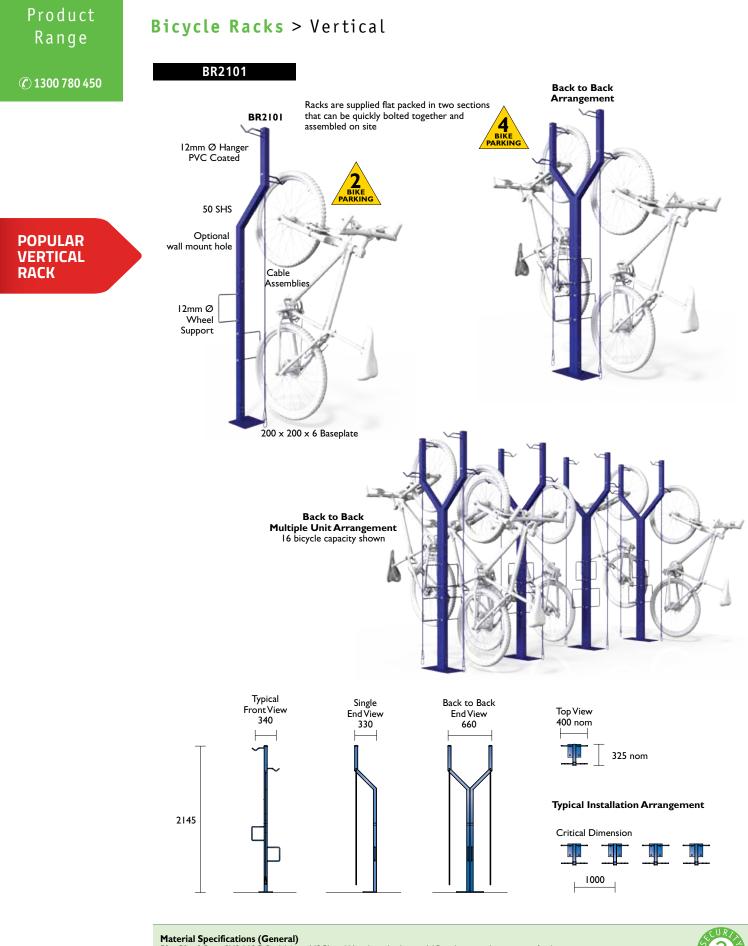

Material Specifications (General) 50 x 50 x 2.5mm SHS / 12Ø Rod / 6mm MS Plate / Hot dipped galvanised / Powder coated in a range of colours PVC coated steel cable assembly



Bicycle Racks > Vertical

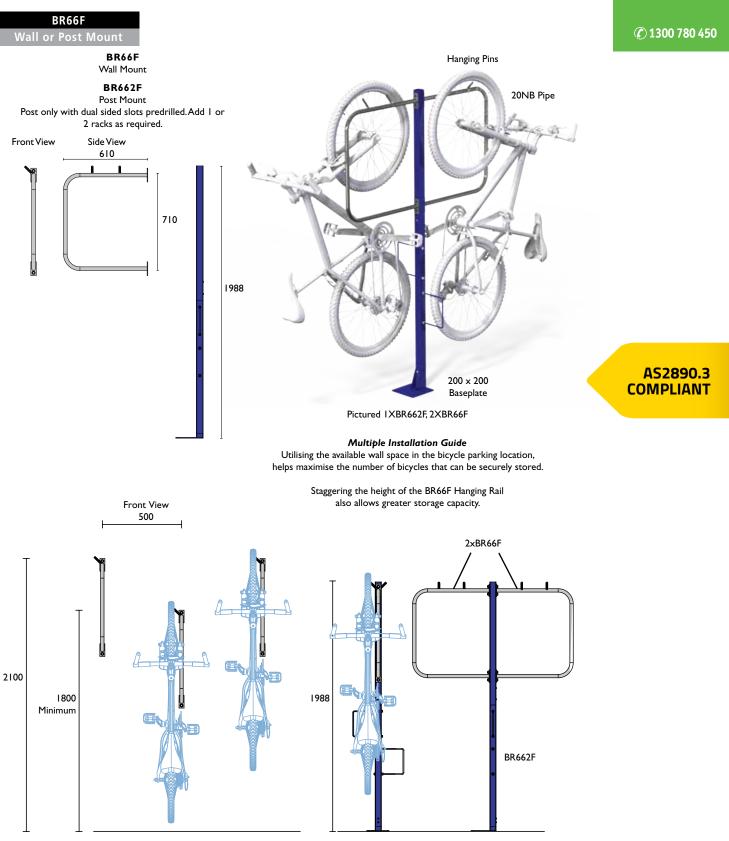

 Material Specifications (General)

 Mild steel
 20NB (25.0) × 1.2mm medium duty pipe / Ø12 Hanging pins / Galvanised / Powder coated in a range of colours

 Stainless steel
 20NB (25.0) × 1.2mm Grade 304 stainless steel pipe / Ø12 Hanging pins / Linished



Product Range

Bicycle Racks > Vertical


1300 780 450



This single unit is best used at the end of rows or hard to reach places.

20NB Pipe leaning rail can be fitted for higher security applications.

BRV21B With leaning rail fitted

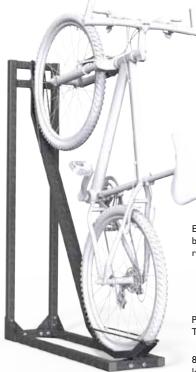


Easy to use back wheel roll on / roll off

Plasma-cut Track

8mm locking bar



AS2890.3 COMPLIANT







 Material Specifications (General)

 Frame
 40 x 40 x 2mm SHS / 8mm round bar

 Wheel guide
 2mm folded galvanised sheet

 Finish
 Hot dipped galvanised



Bicycle Racks > Vertical

BRV26A

Semi Vertical

6

Product



40x40x2mm SHS

BRV26B (With leaning rail fitted)




Using a modular steel frame, the BRV26A is supplied in knock-down kit form allowing it to be easily transported and quickly bolted together on site.

Optional leaning rails can be fitted for higher security applications (BRV26B), as well as wheels to slide the entire rack away from a wall. e.g.intermittent access to storage or utility areas.




AS2890.3 COMPLIANT

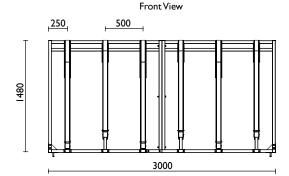

Side View BRV26A

1210





 Material Specifications (General)

 Frame
 40x40x2mm SHS / Hot dipped galvanised / Powder coated in a range of colours

 Track / Rails
 2mm mild steel plate / 20NB (25.0) x 1.2mm Pipe / Hot dipped galvanised or powder coated in a range of colours




Bicycle Racks > Vertical

1300 780 450

Product

Range

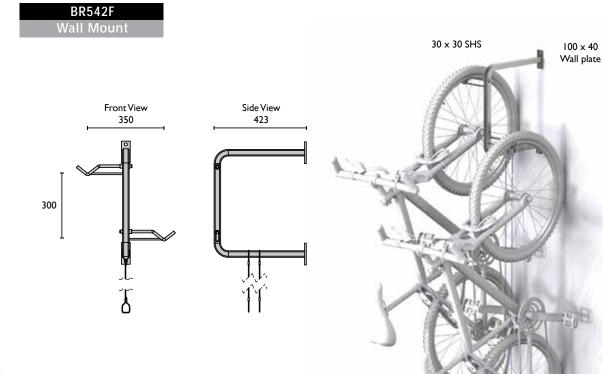


BIGGEST SELLER Wall Mounted

Multiple Installation Guide

Utilising the available wall space in the bicycle parking location, helps maximise the number of bicycles that can be securely stored.



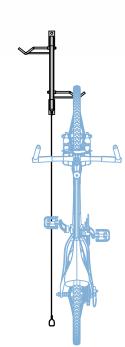

1800 Minimum

 $\begin{array}{l} \textbf{Material Specifications (General)}\\ 30 \times 30 \times 1.6mm SHS / Hot dipped galvanised / Powder coated in a range of colours\\ 100 \times 40 \times 6mm MS plate / Hot dipped galvanised / Powder coated in a range of colours\\ \end{array}$

